



LIGHTING & POWER SOLUTIONS

sounds
~good

JUN 2026

LIGHTING AND POWER SOLUTIONS

table of contents

DMX CABLES

| | |
|-----------------|---|
| data cable dmx | 4 |
| dmx terminators | 6 |
| cable adapters | 7 |

NETWORK CABLES AND PERIPHERALS

| | |
|----------------------|----|
| data cable ethercon | 12 |
| cable drum ethercon | 13 |
| ethercon peripherals | 15 |

ELECTRICAL APPLIANCES

| | |
|--------------------------|----|
| electric box | 22 |
| power distribution units | 26 |

| | |
|------------------------|-----------|
| ELECTRIC CABLES | 34 |
|------------------------|-----------|





DMX CABLES

DATA CABLE DMX

Engineered for interference-free data transmission, our premium DMX cables are the gold standard for professional lighting rigs.

We pair the ultra-rugged **Sommer BINARY 234** 110 Ω cable with industry-leading **Neutrik** XLR connectors to ensure rock-solid signal stability even over long distances.

For professional inventory management, every cable includes transparent heat-shrink tubing as standard, allowing for easy, permanent labeling.

Data Cable DMX, **3-pin XLR** Female to **3-pin XLR** Male

| Product name | SKU | Length |
|-----------------------------|-------------|------------|
| Data Cable DMX, 3-pin, 0,5m | DC-DMX3-0,5 | 0,5 m |
| Data Cable DMX, 3-pin, 1m | DC-DMX3-01 | 1 m |
| Data Cable DMX, 3-pin, 2m | DC-DMX3-02 | 2 m |
| Data Cable DMX, 3-pin, 3m | DC-DMX3-03 | 3 m |
| Data Cable DMX, 3-pin, 5m | DC-DMX3-05 | 5 m |
| Data Cable DMX, 3-pin, 10m | DC-DMX3-10 | 10 m |
| Data Cable DMX, 3-pin, 15m | DC-DMX3-15 | 15 m |
| Data Cable DMX, 3-pin, XXm | DC-DMX3-XX | on request |











Data Cable DMX, **5-pin XLR** Female to **5-pin XLR** Male

| Product name | SKU | Length |
|-----------------------------|-------------|------------|
| Data Cable DMX, 5-pin, 0,5m | DC-DMX5-0,5 | 0,5 m |
| Data Cable DMX, 5-pin, 1m | DC-DMX5-01 | 1 m |
| Data Cable DMX, 5-pin, 2m | DC-DMX5-02 | 2 m |
| Data Cable DMX, 5-pin, 3m | DC-DMX5-03 | 3 m |
| Data Cable DMX, 5-pin, 5m | DC-DMX5-05 | 5 m |
| Data Cable DMX, 5-pin, 10m | DC-DMX5-10 | 10 m |
| Data Cable DMX, 5-pin, 15m | DC-DMX5-15 | 15 m |
| Data Cable DMX, 5-pin, XXm | DC-DMX5-XX | on request |

Data Cable DMX customization options











For our Data Cable DMX we offer custom solutions for clear identification of length and labeling of Your choice.

colored bushings (Neutrik BXX-...)

| BXX-0 | BXX-1 | BXX-2 | BXX-3 | BXX-4 | BXX-5 | BXX-6 | BXX-7 | BXX-8 | BXX-9 |
|---|---|---|---|---|---|--|---|---|---|
| Black | Brown | Red | Orange | Yellow | Green | Blue | Violet | Grey | White |
|  |  |  |  |  |  |  |  |  |  |

(standard)

colored rings (Neutrik XXR-...)

| XXR-0 | XXR-1 | XXR-2 | XXR-3 | XXR-4 | XXR-5 | XXR-6 | XXR-7 | XXR-8 | XXR-9 |
|---|---|---|---|---|---|--|---|---|---|
| Black | Brown | Red | Orange | Yellow | Green | Blue | Violet | Grey | White |
|  |  |  |  |  |  |  |  |  |  |

(standard)

Example of execution only.



laser engraved logo on connector

Example of execution only.



label under transparent shrink tube (male or female side)

! MOQ for custom cables is 10 pcs each length.

DMX TERMINATORS



The DMX Terminator plugs into the final fixture in your lighting chain to properly close the DMX512 signal. By doing so, it stabilizes the data stream and prevents the intermittent glitches or "ghosting" often found in long signal runs.



We offer both **3-pin male XLR** and **5-pin male XLR** DMX Terminators made with **Neutrik** or **Rean** connectors.

Wiring is made as shown on the diagram.

For easy identification we use colored bushing (BXX-...) and "DMX Terminator" laser-engraved text on connectors.

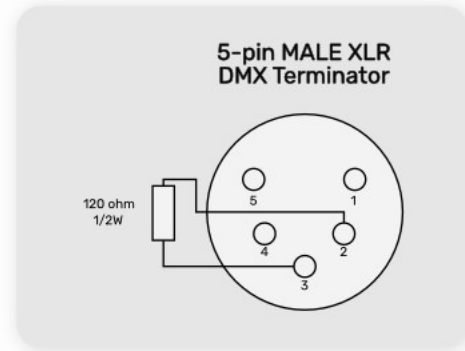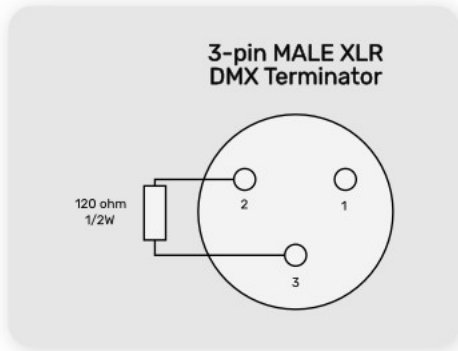

| Product name | SKU | Connector | Colour |
|------------------------------------|-------------|-------------|--------|
| DMX Terminator, XLR 3-pin, Neutrik | AD-DMX3-T-N | XLR 3-pin M | red |
| DMX Terminator, XLR 5-pin, Neutrik | AD-DMX5-T-N | XLR 5-pin M | orange |



CABLE ADAPTERS

System reliability is defined by its weakest link. We eliminate those vulnerabilities with a specialized selection of DMX interconnects designed for seamless transitions across any 3-pin or 5-pin setup. Engineered to maintain a constant 110 Ω impedance, our adapters and terminators provide the rock-solid stability required for high-stakes lighting networks and complex touring rigs.

3-pin male to 5-pin female XLR M/F

- 3-pin male to 5-pin female XLR gender changer
- Sommer BINARY 234 cable
- Neutrik black, silver contacts connectors



| SKU | Connector A | Connector B | Length |
|----------------|----------------|------------------|--------|
| AD-XLR3M-XLR5F | XLR 3-pin male | XLR 5-pin female | 0.2 m |

3-pin female to 5-pin male XLR F/M

- 3-pin female to 5-pin male XLR gender changer
- Sommer BINARY 234 cable
- Neutrik black, silver contacts connectors



| SKU | Connector A | Connector B | Length |
|----------------|------------------|----------------|--------|
| AD-XLR3F-XLR5M | XLR 3-pin female | XLR 5-pin male | 0.2 m |

3-pin XLR Female to Female

- 3-pin female to 3-pin female XLR
- Sommer BINARY 234 cable
- Neutrik black, silver contacts connectors
- yellow braid



| SKU | Connector A | Connector B | Colour | Length |
|----------|------------------|------------------|--------|--------|
| AD-XLR3F | XLR 3-pin female | XLR 3-pin female | Yellow | 0.2 m |

3-pin XLR Male to Male

- 3-pin male to 3-pin male XLR
- Sommer BINARY 234 cable
- Neutrik black, silver contacts connectors
- blue braid



| SKU | Connector A | Connector B | Colour | Length |
|----------|----------------|----------------|--------|--------|
| AD-XLR3M | XLR 3-pin male | XLR 3-pin male | Blue | 0.2 m |

5-pin XLR Female to Female

- 5-pin female to 5-pin female XLR
- Sommer BINARY 234 cable
- Neutrik black, silver contacts connectors
- red braid



| SKU | Connector A | Connector B | Colour | Length |
|----------|------------------|------------------|--------|--------|
| AD-XLR5F | XLR 5-pin female | XLR 5-pin female | Red | 0.2 m |

5-pin XLR Male to Male

- 5-pin male to 5-pin male XLR
- Sommer BINARY 234 cable
- Neutrik black, silver contacts connectors
- grey braid



| SKU | Connector A | Connector B | Colour | Length |
|----------|----------------|----------------|--------|--------|
| AD-XLR5M | XLR 5-pin male | XLR 5-pin male | Gray | 0.2 m |





NETWORK CABLES AND PERIPHERALS

DATA CABLE ETHERCON



Network cables are made with **Sommer SC-MERCATOR Cat 6a** cable. Built using combination of high-performance **Telegärtner RJ45** plug and **Hicon** protective housing are built to endure the most demanding touring environments. Transparent shrink tube for labeling is provided in standard.



Data Cable Ethercon

| Product name | SKU | Length |
|----------------------------------|-------------|--------|
| Data Cable Ethercon, CAT 6a, 2m | DC-ETH6a-2 | 2 |
| Data Cable Ethercon, CAT 6a, 3m | DC-ETH6a-3 | 3 |
| Data Cable Ethercon, CAT 6a, 5m | DC-ETH6a-5 | 5 |
| Data Cable Ethercon, CAT 6a, 10m | DC-ETH6a-10 | 10 |
| Data Cable Ethercon, CAT 6a, 15m | DC-ETH6a-15 | 15 |
| Data Cable Ethercon, CAT 6a, 20m | DC-ETH6a-20 | 20 |

CABLE DRUM ETHERCON

Longer lengths are most convenient when wrapped onto cable drum. Drums used are **Adam Hall 70226** model. Cable is made the same as shorter lengths using **Sommer SC-Mercator Cat 6a** and **Telegärtner RJ45** plug and **Hicon** housing combo. Transparent shrink tube for labeling is provided in standard.

| Product name | SKU | Length |
|-------------------------------------|----------------|--------|
| Data Cable Ethercon Cable Drum, 50m | DC-ETH6a-CD-50 | 50 m |
| Data Cable Ethercon Cable Drum, 60m | DC-ETH6a-CD-60 | 60 m |
| Data Cable Ethercon Cable Drum, 70m | DC-ETH6a-CD-70 | 70 m |
| Data Cable Ethercon Cable Drum, 80m | DC-ETH6a-CD-80 | 80 m |









Adam Hall 70226 cable drum

Data Cable Ethercon customization options

For our Data Cable Ethercon we offer custom solutions for clear identification of length and labeling of Your choice.



colored bushings (Hicon RC-...)

| HI-RC-SW | HI-RC-RT | HI-RC-GE | HI-RC-GN | HI-RC-BL | HI-RC-GR |
|---|---|---|---|---|---|
| Black | Red | Yellow | Green | Blue | Grey |
|  |  |  |  |  |  |

protective cap with fixing rope (HI-CAP-19MM)



laser engraved logo on connector

Example of execution only.



label under transparent shrink tube (male or female side)

Example of execution only.



! MOQ for custom cables is 10 pcs each length.

ETHERCON PERIPHERALS

Streamline your stage or studio setup with the **CAT Tail, Box** and **Signal Panel** system. Designed to transmit four independent signal channels (Analog, AES/EBU, or DMX) over a single Ethercon-equipped cable, this solution dramatically reduces cable clutter and setup time.

While multiple conventions exist for transmitting balanced analog audio via RJ45, we utilize the widely-adopted industry standard as detailed in the table below.

This pinout ensures seamless integration with professional audio-over-CAT hardware, providing a reliable, low-noise solution for multi-channel signal transport.



RJ45 to analog pinout

AES72-4E T568B

| RJ45 pin | RJ45 color | Function |
|----------|--------------|------------------------|
| 1 | white-orange | CH1 + |
| 2 | orange | CH2 - |
| 3 | white-green | CH2 + |
| 4 | blue | CH3 - |
| 5 | white-blue | CH3 + |
| 6 | green | CH2 - |
| 7 | white-brown | CH4 + |
| 8 | brown | CH4 - |
| | | common shield / ground |



CAT Tail

The Ultra-Mobile Solution

The **CAT Tail** is the perfect lightweight breakout for "ad-hoc" cabling. Its flexible design is ideal for quick deployments, tight spaces behind racks, or mobile rigs where weight and speed are your top priorities.



| Product name | Connectors | Side connector | SKU |
|----------------------------------|------------|----------------|-------------|
| CAT Tail, adapter RJ45, 4x XLR F | 4x XLR F | Ethercon | AD-RJ45-4/0 |
| CAT Tail, adapter RJ45, 4x XLR M | 4x XLR M | Ethercon | AD-RJ45-0/4 |

CAT Box

Built for the Road

For more demanding environments, the **CAT Box** offers a ruggedized, heavy-duty housing. Designed to withstand the physical rigors of touring and stage use, it provides a stable hub for signal distribution.



| Product name | Top connector | Side connector | SKU |
|---------------------------------|---------------|----------------|-------------|
| CAT Box, adapter RJ45, 4x XLR F | 4x XLR F | Ethercon | SB-RJ45-4/0 |
| CAT Box, adapter RJ45, 4x XLR M | 4x XLR M | Ethercon | SB-RJ45-0/4 |

Signal Panel CAT

Built for the Rack

While the **CAT Tail** is built for ad-hoc mobility and the **CAT Box** for stage floor durability, the **Signal Panel CAT** is the definitive "nerve center" for your equipment racks. It eliminates messy XLR looms and replaces them with a single, streamlined network run, reducing weight and significantly speeding up load-in times.

SP-1U-XLRM-RJ45



SP-1U-XLRF-RJ45




| Product name | Configuration | SKU |
|--|---------------|-----------------|
| Signal Panel CAT, 1U, 4x XLR M, Ethercon | ETH, 4x XLR M | SP-1U-XLRM-RJ45 |
| Signal Panel CAT, 1U, 4x XLR F, Ethercon | ETH, 4x XLR F | SP-1U-XLRF-RJ45 |

Signal Panel CAT Dual

When You need more

The **Signal Panel CAT Dual** is continuation of Signal Panel CAT which houses two separate Ethercon-to-XLR lines. Comes with three different configurations and looks to choose from.

SP-1U-XLRMF-RJ45-DUAL



SP-1U-XLRM-RJ45-DUAL



SP-1U-XLRF-RJ45-DUAL



| Product name | Configuration | SKU |
|--|----------------------------|-----------------------|
| Signal Panel CAT DUAL, 1U, 8x XLR M, 2x Ethercon | ETH, 4x XLR M | SP-1U-XLRM-RJ45-DUAL |
| Signal Panel CAT DUAL, 1U, 8x XLR F, 2x Ethercon | ETH, 4x XLR F | SP-1U-XLRF-RJ45-DUAL |
| Signal Panel CAT DUAL, 1U, 4x XLR F, 4x XLR M, 2x Ethercon | 2x ETH, 4x XLR F 4x XLR Mv | SP-1U-XLRMF-RJ45-DUAL |

Signal Panel PARALLEL


Heavy-duty solution

Signal Panel PARALLEL is a series of 2U rack panels.


By consolidating all XLR I/O (and Ethercon on the PARALLEL12-DMX) into a single multipin connector, this series offers total patching freedom and drastically reduces setup time. Whether you are managing complex stage audio or high-universe lighting networks, the PARALLEL series provides a streamlined interface that eliminates cable clutter

All of the panels feature XLR cable fan on the back.


SP-2U-PARALLEL8-SVK25

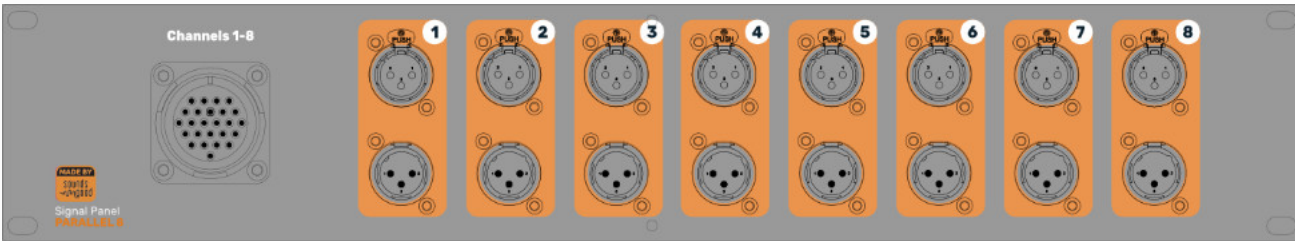

SP-2U-PARALLEL12-SVK37

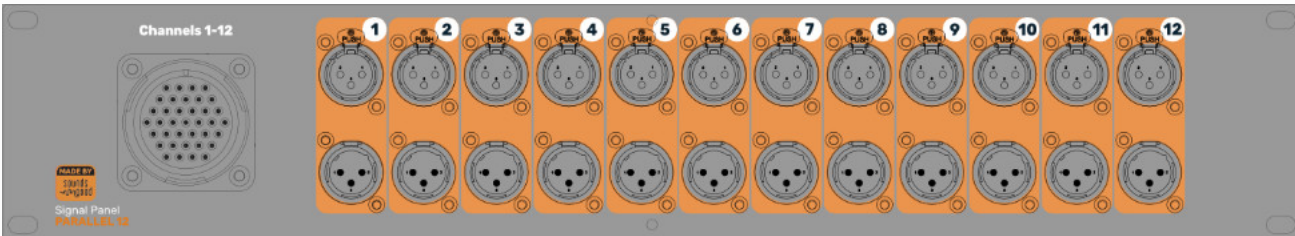

SP-2U-PARALLEL12-DMX-SVK37

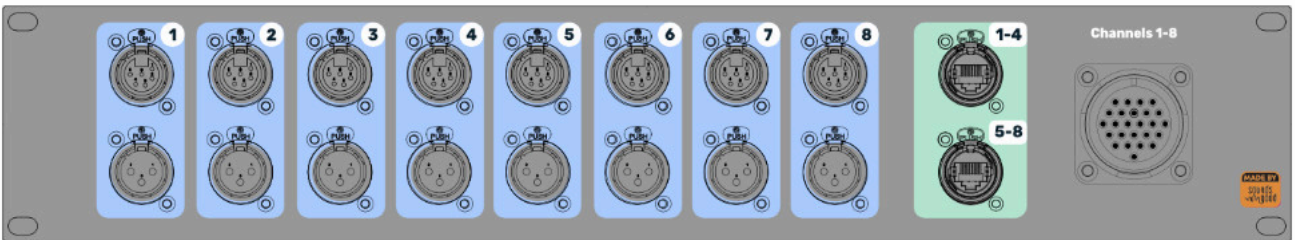

| Product name | Configuration | SKU |
|--|--|---------------------------------|
| Signal Panel Parallel 8 (XLR Male fanout) | 8x XLR M, 8x XLR F, SVK25 | SP-2U-PARALLEL8-SVK25-XLRM |
| Signal Panel Parallel 8 (XLR Female fanout) | 8x XLR M, 8x XLR F, SVK25 | SP-2U-PARALLEL8-SVK25-XLRF |
| Signal Panel Parallel 12 (XLR Male fanout) | 12x XLR M, 12x XLR F, SVK37 | SP-2U-PARALLEL12-SVK37-XLRM |
| Signal Panel Parallel 12 (XLR Female fanout) | 12x XLR M, 12x XLR F, SVK37 | SP-2U-PARALLEL12-SVK37-XLRF |
| Signal Panel Parallel 8 DMX (XLR 3-pin M fanout) | 8x XLR 3-pin F, 8x XLR 5-pin F, 2x ETH, SVK37 | SP-2U-PARALLEL8-DMX-SVK37-XLR3M |
| Signal Panel Parallel 8 DMX (XLR 5-pin M fanout) | 8x XLR 3-pin F, 8x XLR 5-pin F, 2x ETH, SVK37 | SP-2U-PARALLEL8-DMX-SVK37-XLR5M |



ELECTRICAL APPLIANCES



ELECTRIC BOX

Our **Electric Box** line offers versatile electrical breakout options in a compact, high-strength form factor. Featuring a heavy-duty, powder-coated steel chassis, these boxes provide a secure and organized power interface for any stage or studio application.

Electric Box series 4

- 6x PCE 1050-0ss Shucko sockets
- PoweCON or PowerCON TRUE1 IN and OUT
- powder-coated rugged case



285mm x 70mm x 80mm




0.9 kg



| Product | Side connectors | SKU |
|--|------------------------------|--------------------|
| Electric Box, 4x 230V, PowerCon IN, 2x OUT | PowerCON IN and 2x OUT | EB04-230S-PCAB-I20 |
| Electric Box, 4x 230V, PowerCon TRUE1 IN, 2x OUT | PowerCON TRUE1 IN and 2x OUT | EB04-230S-TCMF-I20 |



EB04-230S-PCAB-I20 side A and B

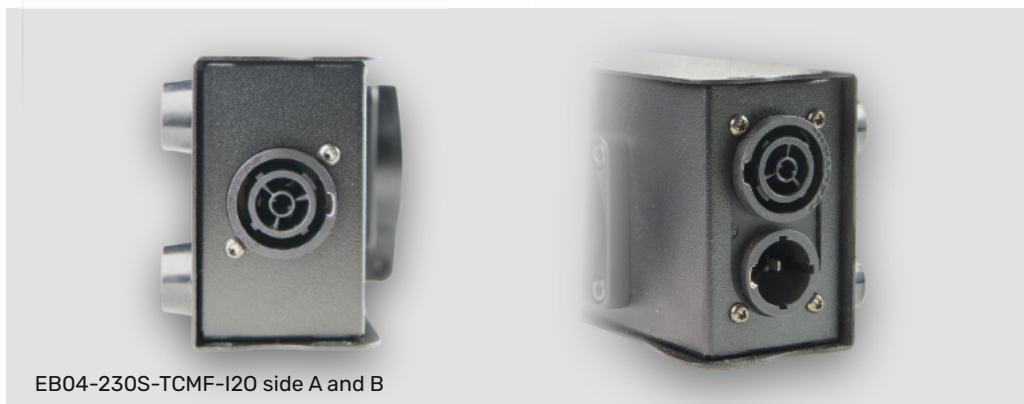

EB04-230S-TCMF-I20 side A and B

Electric Box series 6


- 6x PCE 1050-0ss Shucko sockets
- PoweCON or PowerCON TRUE1 IN and OUT
- powder-coated rugged case



385mm x 70mm x 80mm



1.3 kg

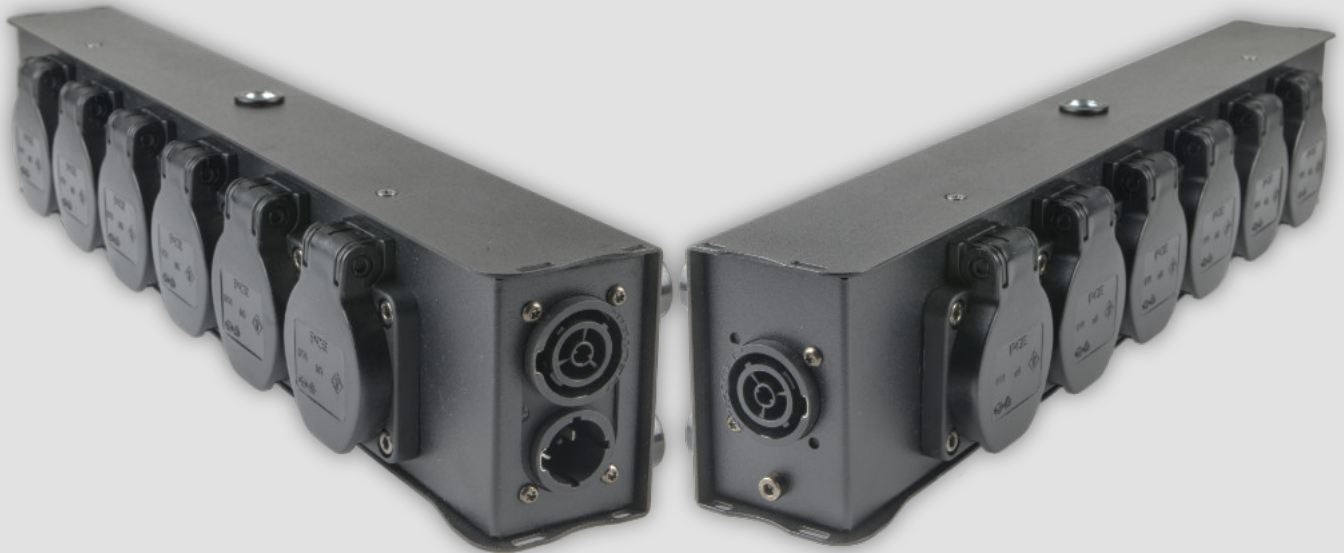

EB06-230S-TCMF-I20 side A and B

| Product | Side connectors | SKU |
|--|------------------------------|--------------------|
| Electric Box, 6x 230V, PowerCon IN, 2x OUT | PowerCON IN and 2x OUT | EB06-230S-PCAB-I20 |
| Electric Box, 6x 230V, PowerCon TRUE1 IN, 2x OUT | PowerCON TRUE1 IN and 2x OUT | EB06-230S-TCMF-I20 |

Electric Box series 6 SSX

- 6x PCE 1050-0ss Shucko sockets
- Syntax SSX19MP multipin inlet connector
- powder-coated rugged case



430mm x 85mm x 95mm



1.8 kg



EB06-230S-SSX side view

| Product | Side connector | SKU |
|-----------------------------------|----------------|---------------|
| Electric Box, 6x 230V, Syntax SSX | Syntax SSX19MP | EB06-230S-SSX |

POWER DISTRIBUTION UNITS

From Mobile Breakouts to Full-Scale Integration



Reliability isn't just a feature of our Power Distribution Units—it's the foundation.

Designed to meet the rigorous demands of the touring and event industries, our PDU range ensures your system stays powered, protected, and compliant with EU electrical standards.

Our range of available connectivity options featuring CEE, Syntax SSX, powerCON, True1, and Schuko outlets helps seamlessly integrate into any existing rental fleet or venue infrastructure.

Versatile Applications

- Live Concerts & Touring Festivals
- Theatre & Stage Productions
- Broadcast & Corporate AV Events
- Equipment Rental Houses



We offer two distinct paths for your power management:

Our Modular 2U Series, designed for high-density mobile racks with interchangeable panels, and our Bespoke Rack Solutions.

For clients requiring a centralized power hub, we build fully custom PDUs integrated directly into the rack case of your choice. Featuring premium Siemens protection and PCE connectivity, our PDUs are engineered to be the most reliable link in your power chain.




Power Distribution Unit 32A

The **PDU 32A** is a rugged, **2U rack-mountable** power center engineered for the rigorous demands of the touring and event industry. Fully compliant with EU electrical safety standards, this unit provides a stage-grade solution you can rely on.

We understand that every rig is different. That's why we offer a **fully modular** approach, allowing you to mix and match front and back panels to create a configuration tailored to your specific workflow.

While our standard units feature high-reliability **Siemens MCB** protection, we also offer RCBO upgrades upon request for enhanced safety.

To ensure maximum durability, we use **PCE** connectors exclusively across the entire range.

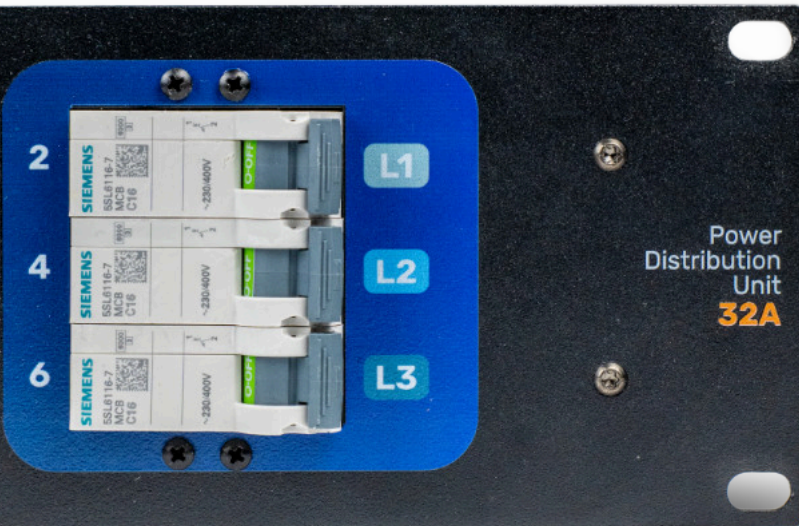


! Refer to pages 29-31 to check if We support configuration You need.



PDU 32A configurations and naming

SKU naming:

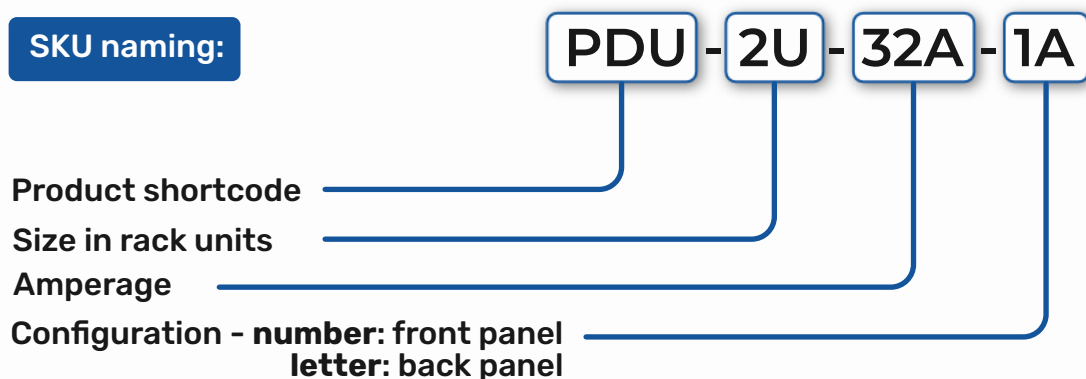


Possible configurations:

| | | FRONT PANELS | | | | | | | | |
|-------------|---|--------------|---|---|---|---|---|---|---|---|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| BACK PANELS | A | • | • | • | • | • | • | • | | |
| | B | • | • | • | • | • | • | • | | |
| | C | • | • | • | • | • | • | • | | |
| | D | • | • | • | | | | • | • | • |
| | E | • | • | • | | | | • | • | • |
| | F | • | • | • | | | | • | • | • |

Abbreviations used:

| Code | Description | Producer code |
|----------|----------------------|---------------|
| 230S | 230V Schuko | PCE 1050-0ss |
| CEE IN | CEE Input | PCE 315-6x |
| CEE LOOP | CEE Output | PCE 625-6x |
| PCB | Neutrik PowerCON OUT | NAC3MPXXB |
| TCF | Neutrik TRUE1 Female | NAC3FPX-TOP |

PDU 32A front panels

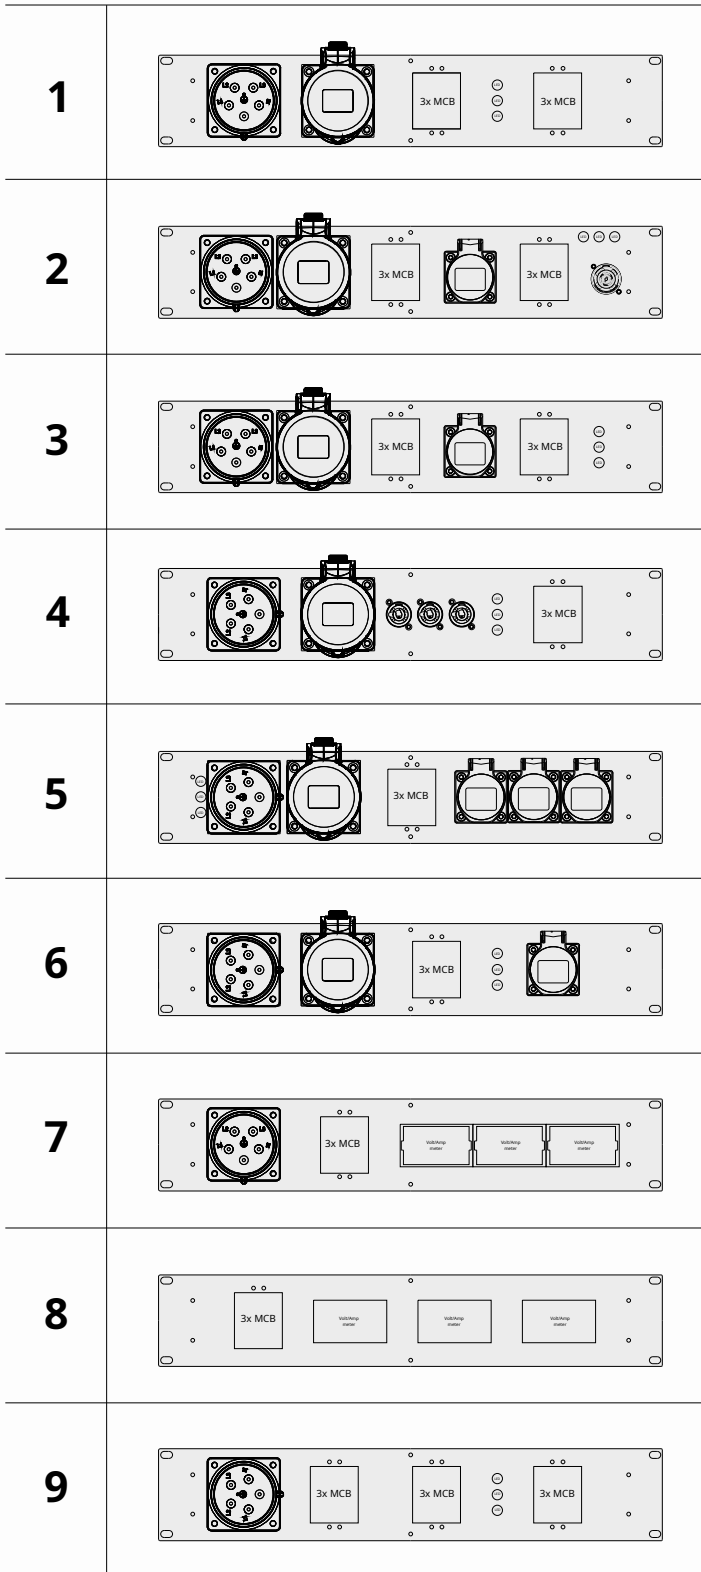


| ID | Configuration | Fuses |
|----|---------------------------|-------|
| 1 | CEE IN/LOOP | 6 |
| 2 | CEE IN/LOOP, 230S, TCF | 6 |
| 3 | CEE IN/LOOP, 230S, 6x MCB | 6 |
| 4 | CEE IN/LOOP, 3x PCB | 3 |
| 5 | CEE IN/LOOP, 3x 230S | 3 |
| 6 | CEE IN/LOOP, 230S, 3x MCB | 3 |
| 7 | CEE IN, 230S, 3x MCB | 3 |
| 8 | 3x Volt Amp meter | 3 |
| 9 | CEE IN | 9 |



For full-sized drawings visit:
<https://soundsgood.pl/drawings>


PDU 32A back panels

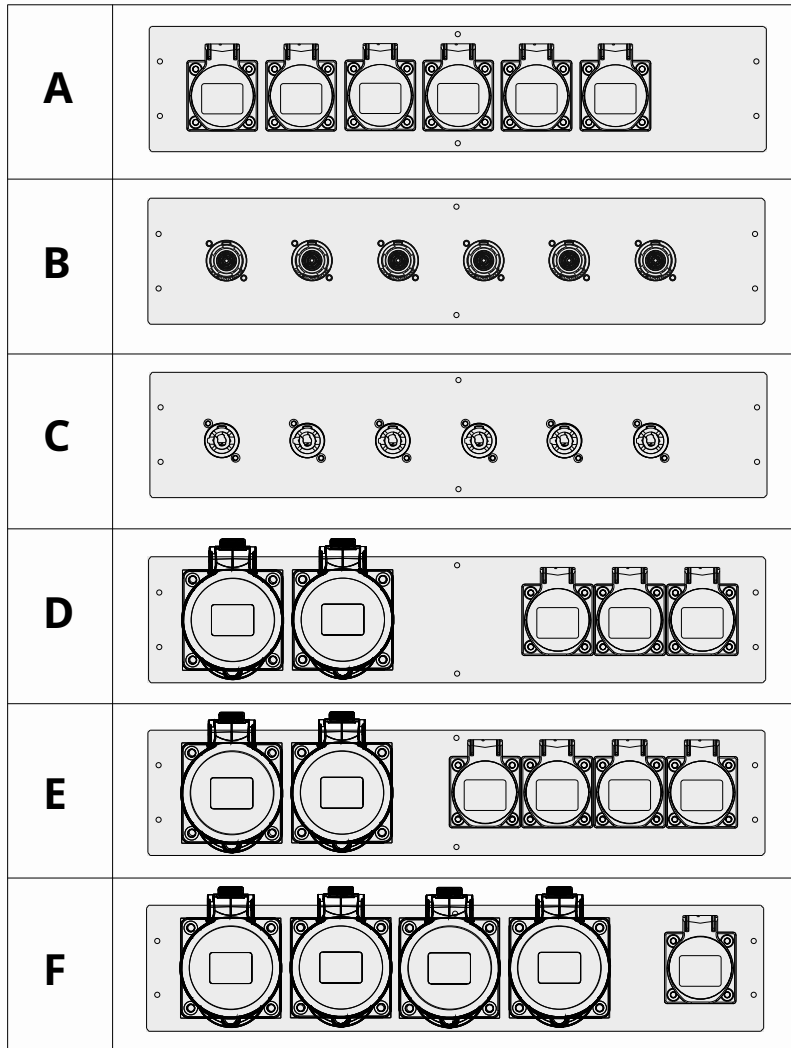

| ID | Configuration | Fuses |
|----|-----------------|-------|
| A | 6x 230S | n/a |
| B | 6x TCF | n/a |
| C | 6x PCB | n/a |
| D | 2x CEE, 3x 230S | n/a |
| E | 2x CEE, 4x 230S | n/a |
| F | 4x CEE, 230S | n/a |



For full-sized drawings visit:
<https://soundsgood.pl/drawings>

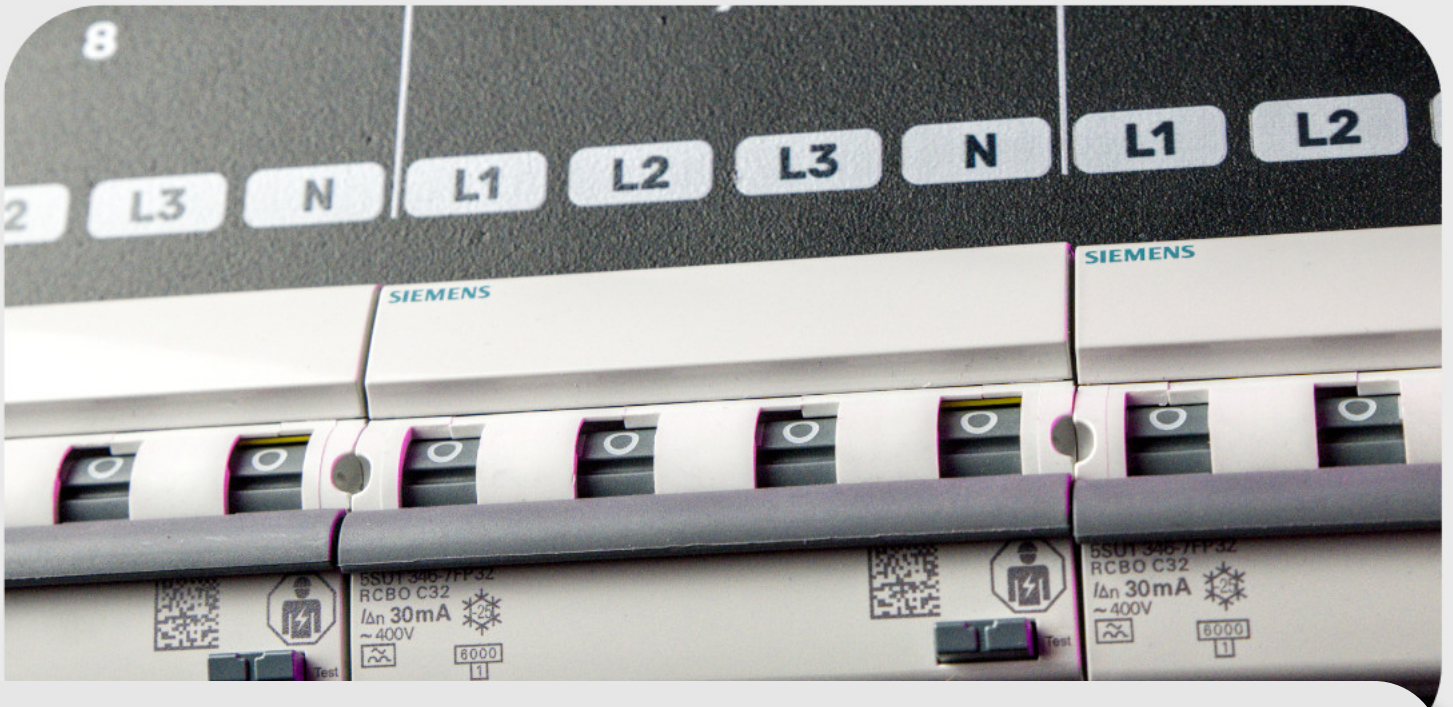

Bespoke 63A Power Distribution System

Custom Power Distribution Units can be made exactly as You need them.

This specific unit was tailored for a client needing a mix of CEE, Schuko, and PowerCON TRUE1 outputs. With the addition of real-time 3-phase power monitoring, the operator has total transparency of the system's electrical health at a glance.

By utilizing Siemens RCBOs throughout the entire build, we provide the highest level of protection against both short circuits and earth leakage—essential for outdoor events and complex stage rigs.





ELECTRIC CABLES

ELECTRIC CABLES

Engineered for uncompromising power delivery, our Electric Cable range is the robust backbone of safe and reliable stage setups.

We utilize high-performance **TITANEX** H07RN-F cabling exclusively, paired with a selection of industry-leading connectors from **PCE** and **Neutrik**. To support professional workflow and organization, every cable includes integrated transparent heat-shrink tubing as standard, allowing for easy and permanent inventory identification.

SKU naming: **EC - 230P - PCA - 3G2,5T - 5**

Product shortcode — EC

Connector side A — 230P

Connector side B — PCA

Cable type — 3G2,5T

Length in meters — 5

| Neutrik PowerCON / TRUE1 | |
|--------------------------|-------------------------------------|
| PCA | PowerCON A - Blue |
| PCB | PowerCON B - White |
| TCF | PowerCON True1 Female |
| TCM | PowerCON True1 Male |
| PCAB | PowerCON A/B - Blue/White |
| TCMF | PowerCON True1 Male/Female |
| Shuko 16A 230V | |
| 230P | Schuko 16A, 3-pin inline plug |
| 230S | Schuko 16A, 3-pin socket |
| 3230S | 3-way socket |
| CEE 32A | |
| CEE32-5P | CEE 32A, 5-pin (3P+N+E) inline plug |
| CEE32-5S | CEE 32A, 5-pin (3P+N+E) socket |

| | |
|--------|---------------------------------------|
| 3G1,5T | Titanex H07RN-F 3x1,5 mm ² |
| 3G2,5T | Titanex H07RN-F 3x2,5 mm ² |
| 5G4T | Titanex H07RN-F 5x4,0 mm ² |

Electric Cable PowerCON 3x1,5 mm²

Electric Cable, Titanex 3x1,5 mm²
PowerCon True1 **Male to Female**

| SKU | Length |
|--------------------|--------|
| EC-TCMF-3G1,5T-1 | 1 |
| EC-TCMF-3G1,5T-1,5 | 1,5 |
| EC-TCMF-3G1,5T-2 | 2 |
| EC-TCMF-3G1,5T-3 | 3 |
| EC-TCMF-3G1,5T-5 | 5 |
| EC-TCMF-3G1,5T-10 | 10 |
| EC-TCMF-3G1,5T-15 | 15 |
| EC-TCMF-3G1,5T-20 | 20 |
| EC-TCMF-3G1,5T-25 | 25 |

IP65

TITANEX 3G1,5



Electric Cable, Titanex 3x1,5 mm²
Schuko, PowerCon True1 **Female**

| SKU | Length |
|------------------------|--------|
| EC-230P-TCF-3G1,5T-1 | 1 |
| EC-230P-TCF-3G1,5T-1,5 | 1,5 |
| EC-230P-TCF-3G1,5T-2 | 2 |
| EC-230P-TCF-3G1,5T-3 | 3 |
| EC-230P-TCF-3G1,5T-5 | 5 |
| EC-230P-TCF-3G1,5T-10 | 10 |
| EC-230P-TCF-3G1,5T-15 | 15 |
| EC-230P-TCF-3G1,5T-20 | 20 |
| EC-230P-TCF-3G1,5T-25 | 25 |

IP65

TITANEX 3G1,5



Electric Cable, Titanex 3x1,5 mm²
PowerCon **A/B**

| SKU | Length |
|--------------------|--------|
| EC-PCAB-3G1,5T-1 | 1 |
| EC-PCAB-3G1,5T-1,5 | 1,5 |
| EC-PCAB-3G1,5T-2 | 2 |
| EC-PCAB-3G1,5T-3 | 3 |
| EC-PCAB-3G1,5T-5 | 5 |
| EC-PCAB-3G1,5T-10 | 10 |
| EC-PCAB-3G1,5T-15 | 15 |
| EC-PCAB-3G1,5T-20 | 20 |
| EC-PCAB-3G1,5T-25 | 25 |

IP20

TITANEX 3G1,5



Electric Cable, Titanex 3x1,5mm²
Schuko, PowerCon A

| SKU | Length |
|------------------------|--------|
| EC-230P-PCA-3G1,5T-1 | 1 |
| EC-230P-PCA-3G1,5T-1,5 | 1,5 |
| EC-230P-PCA-3G1,5T-2 | 2 |
| EC-230P-PCA-3G1,5T-3 | 3 |
| EC-230P-PCA-3G1,5T-5 | 5 |
| EC-230P-PCA-3G1,5T-10 | 10 |
| EC-230P-PCA-3G1,5T-15 | 15 |
| EC-230P-PCA-3G1,5T-20 | 20 |
| EC-230P-PCA-3G1,5T-25 | 25 |

IP54 / IP20

TITANEX 3G1,5



Electric Cable PowerCON 3x2,5 mm²

Electric Cable, Titanex 3x2,5 mm²
PowerCon True1 **Male** to **Female**

IP65

TITANEX 3G2,5

| SKU | Length |
|--------------------|--------|
| EC-TCMF-3G2,5T-1 | 1 |
| EC-TCMF-3G2,5T-1,5 | 1,5 |
| EC-TCMF-3G2,5T-2 | 2 |
| EC-TCMF-3G2,5T-3 | 3 |
| EC-TCMF-3G2,5T-5 | 5 |
| EC-TCMF-3G2,5T-10 | 10 |
| EC-TCMF-3G2,5T-15 | 15 |
| EC-TCMF-3G2,5T-20 | 20 |
| EC-TCMF-3G2,5T-25 | 25 |



Electric Cable, Titanex 3x2,5 mm²
Schuko, PowerCon True1 **Female**

IP65

TITANEX 3G2,5

| Length | SKU |
|------------------------|-----|
| EC-230P-TCF-3G2,5T-1 | 1 |
| EC-230P-TCF-3G2,5T-1,5 | 1,5 |
| EC-230P-TCF-3G2,5T-2 | 2 |
| EC-230P-TCF-3G2,5T-3 | 3 |
| EC-230P-TCF-3G2,5T-5 | 5 |
| EC-230P-TCF-3G2,5T-10 | 10 |
| EC-230P-TCF-3G2,5T-15 | 15 |
| EC-230P-TCF-3G2,5T-20 | 20 |
| EC-230P-TCF-3G2,5T-25 | 25 |



Electric Cable, Titanex 3x2,5 mm²
PowerCon **A/B**

| SKU | Length |
|--------------------|--------|
| EC-PCAB-3G2,5T-1 | 1 |
| EC-PCAB-3G2,5T-1,5 | 1,5 |
| EC-PCAB-3G2,5T-2 | 2 |
| EC-PCAB-3G2,5T-3 | 3 |
| EC-PCAB-3G2,5T-5 | 5 |
| EC-PCAB-3G2,5T-10 | 10 |
| EC-PCAB-3G2,5T-15 | 15 |
| EC-PCAB-3G2,5T-20 | 20 |
| EC-PCAB-3G2,5T-25 | 25 |

IP20

TITANEX 3G2,5



Electric Cable, Titanex 3x2,5mm²
Schuko, PowerCon A

| SKU | Length |
|------------------------|--------|
| EC-230P-PCA-3G2,5T-1 | 1 |
| EC-230P-PCA-3G2,5T-1,5 | 1,5 |
| EC-230P-PCA-3G2,5T-2 | 2 |
| EC-230P-PCA-3G2,5T-3 | 3 |
| EC-230P-PCA-3G2,5T-5 | 5 |
| EC-230P-PCA-3G2,5T-10 | 10 |
| EC-230P-PCA-3G2,5T-15 | 15 |
| EC-230P-PCA-3G2,5T-20 | 20 |
| EC-230P-PCA-3G2,5T-25 | 25 |

IP54 / IP20

TITANEX 3G2,5



Electric Cable Shucko 3x2,5 mm²

Electric Cable, Titanex 3x2,5 mm²
Schuko **Plug / Socket**

| SKU | Length |
|------------------------|--------|
| EC-230P-230S-3G2,5T-3 | 3 |
| EC-230P-230S-3G2,5T-5 | 5 |
| EC-230P-230S-3G2,5T-10 | 10 |
| EC-230P-230S-3G2,5T-15 | 15 |
| EC-230P-230S-3G2,5T-20 | 20 |
| EC-230P-230S-3G2,5T-25 | 25 |
| EC-230P-230S-3G2,5T-30 | 30 |

IP54

TITANEX 3G2,5



Electric Cable, Titanex 3x2,5 mm²
Schuko **Plug / 3-way connector**

| SKU | Length |
|-------------------------|--------|
| EC-230P-3230S-3G2,5T-3 | 3 |
| EC-230P-3230S-3G2,5T-5 | 5 |
| EC-230P-3230S-3G2,5T-10 | 10 |
| EC-230P-3230S-3G2,5T-15 | 15 |
| EC-230P-3230S-3G2,5T-20 | 20 |
| EC-230P-3230S-3G2,5T-25 | 25 |
| EC-230P-3230S-3G2,5T-30 | 30 |

IP54

TITANEX 3G2,5



Electric Cable CEE 32A 5x4,0 mm²

Electric Cable, Titanex 5x4mm²
CEE 32A 5P **IN/OUT**

IP44 / IP54

TITANEX 5G4

| SKU | Length |
|------------------------------|--------|
| EC-CEE32-5P-CEE32-5S-5G4T-1 | 1 |
| EC-CEE32-5P-CEE32-5S-5G4T-3 | 3 |
| EC-CEE32-5P-CEE32-5S-5G4T-4 | 4 |
| EC-CEE32-5P-CEE32-5S-5G4T-5 | 5 |
| EC-CEE32-5P-CEE32-5S-5G4T-6 | 6 |
| EC-CEE32-5P-CEE32-5S-5G4T-8 | 8 |
| EC-CEE32-5P-CEE32-5S-5G4T-10 | 10 |
| EC-CEE32-5P-CEE32-5S-5G4T-15 | 15 |
| EC-CEE32-5P-CEE32-5S-5G4T-20 | 20 |
| EC-CEE32-5P-CEE32-5S-5G4T-25 | 25 |



! CEE 64A and 125A are available upon request.



ORDERING AND CONTACT



For ordering please provide SKU code of products and needed customizations.



Sounds Good sp. z o. o.
Siemianowicka 4/22, 52-007
Wrocław, POLAND

Office and warehouse:

Tęczowa 25, 53-601
Wrocław, POLAND

email: contact@soundsgood.pl

tel: +48 503 105 949

web: www.soundsgood.pl

Hungary distribution:



Uncompromised Technical Support Bt.

email: info@utsaudio.hu

tel: +36 30 323 3721

Please note that the information contained in this catalogue does not constitute a binding offer. The manufacturer reserves the right to modify product specifications and designs without prior notice.

While every effort has been made to ensure accuracy, we cannot guarantee that the information is free of errors or omissions.

E&OE (Errors and Omissions Excepted).

Actual product colours may vary slightly from those shown due to printing techniques or monitor settings.

